

Scope of Works


1. Provision of Ceiling

Use the following material: 5.8m x 5.5m ceiling area

- 2" x 3" x 12' rough lumber for ceiling outside frame,
- 2" x 2" x 12' rough lumber for ceiling cross frames
- ¼" x 4' x 8' marine plywood for the ceiling panel
- 3" concrete nail, 2 ½" CWN and 1" finishing nail for the fastening of ceiling
- Use colorless wood preservatives


2. Provision of Lighting

Install 3-16 watts S-COB LED, please refer to bill of materials and cost estimate for other materials to be installed.

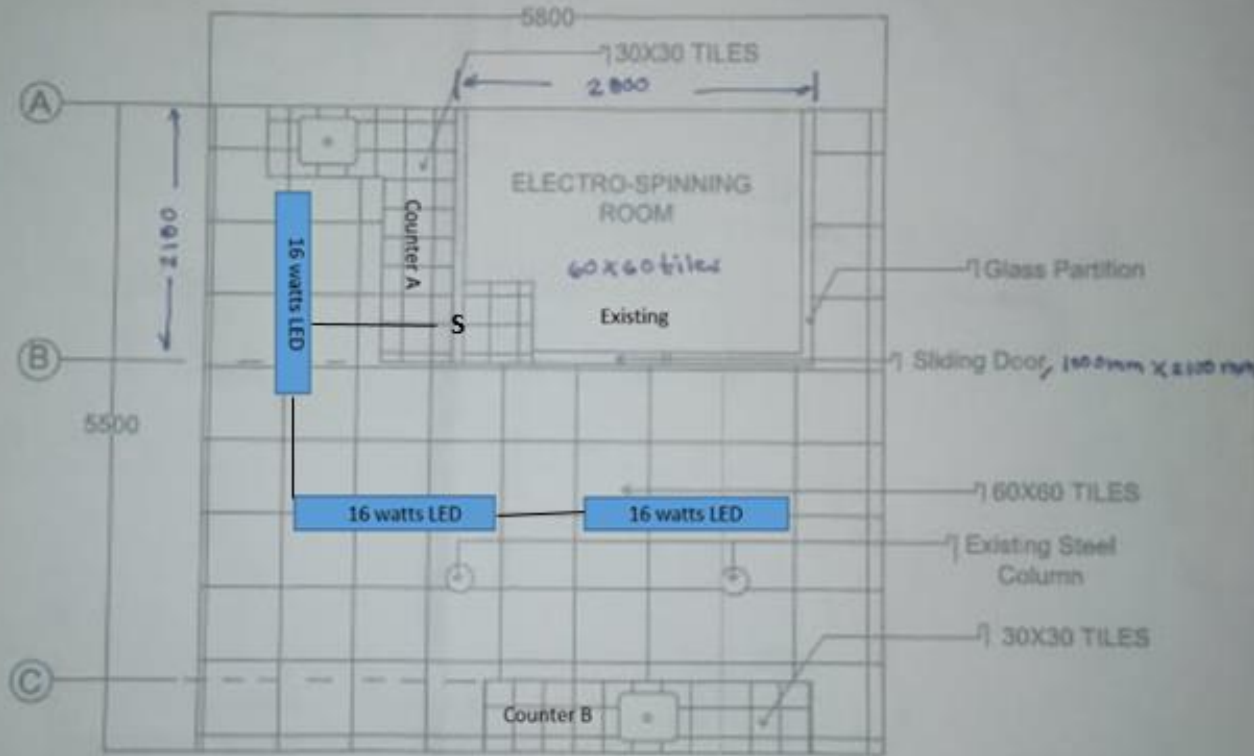

FLOOR PLAN

Note: Subject to actual verification by the Contractor and PhilFIDA

OWNER	PROJECT TITLE/LOCATION	SHEET CONTENTS	RECOMMENDING APPROVAL	APPROVED	SHEET NO.
 PHILIPPINE FIBER INDUSTRY DEVELOPMENT AUTHORITY 3F DA-POF BLDG. DEPARTMENT OF AGRICULTURE ELLIPTICAL ROAD, DILMAN, QUEZON CITY	Provision of Ceiling, Lighting, Floor Tiles, Counter Cabinets and Painting of Ceiling and Counter Cabinets at Dynamic Spinning Machine Area at PhilFIDA-FPUL, BAI Compound, Visayas Ave, Brgy. Vasra, Quezon City		REMEDIOS V. ABGONA, PhD CHIEF, FIBER UTILIZATION AND TECHNOLOGY DIVISION	KENNEDY T. COSTALES EXECUTIVE DIRECTOR II	A-02 02/15


Scope of Works

3. Installation of Floor Tiles

Use the following material:

- a. Ceramic Floor Tiles, 60cm x 60 cm, color subject for approval
- b. Tile Adhesive
- c. Tile Grout
- d. Tile Adhesive Modifier


4. Installation of Counter Cabinets @ Counter A and Counter B, please refer to bill of materials and cost estimate for the installation of materials.

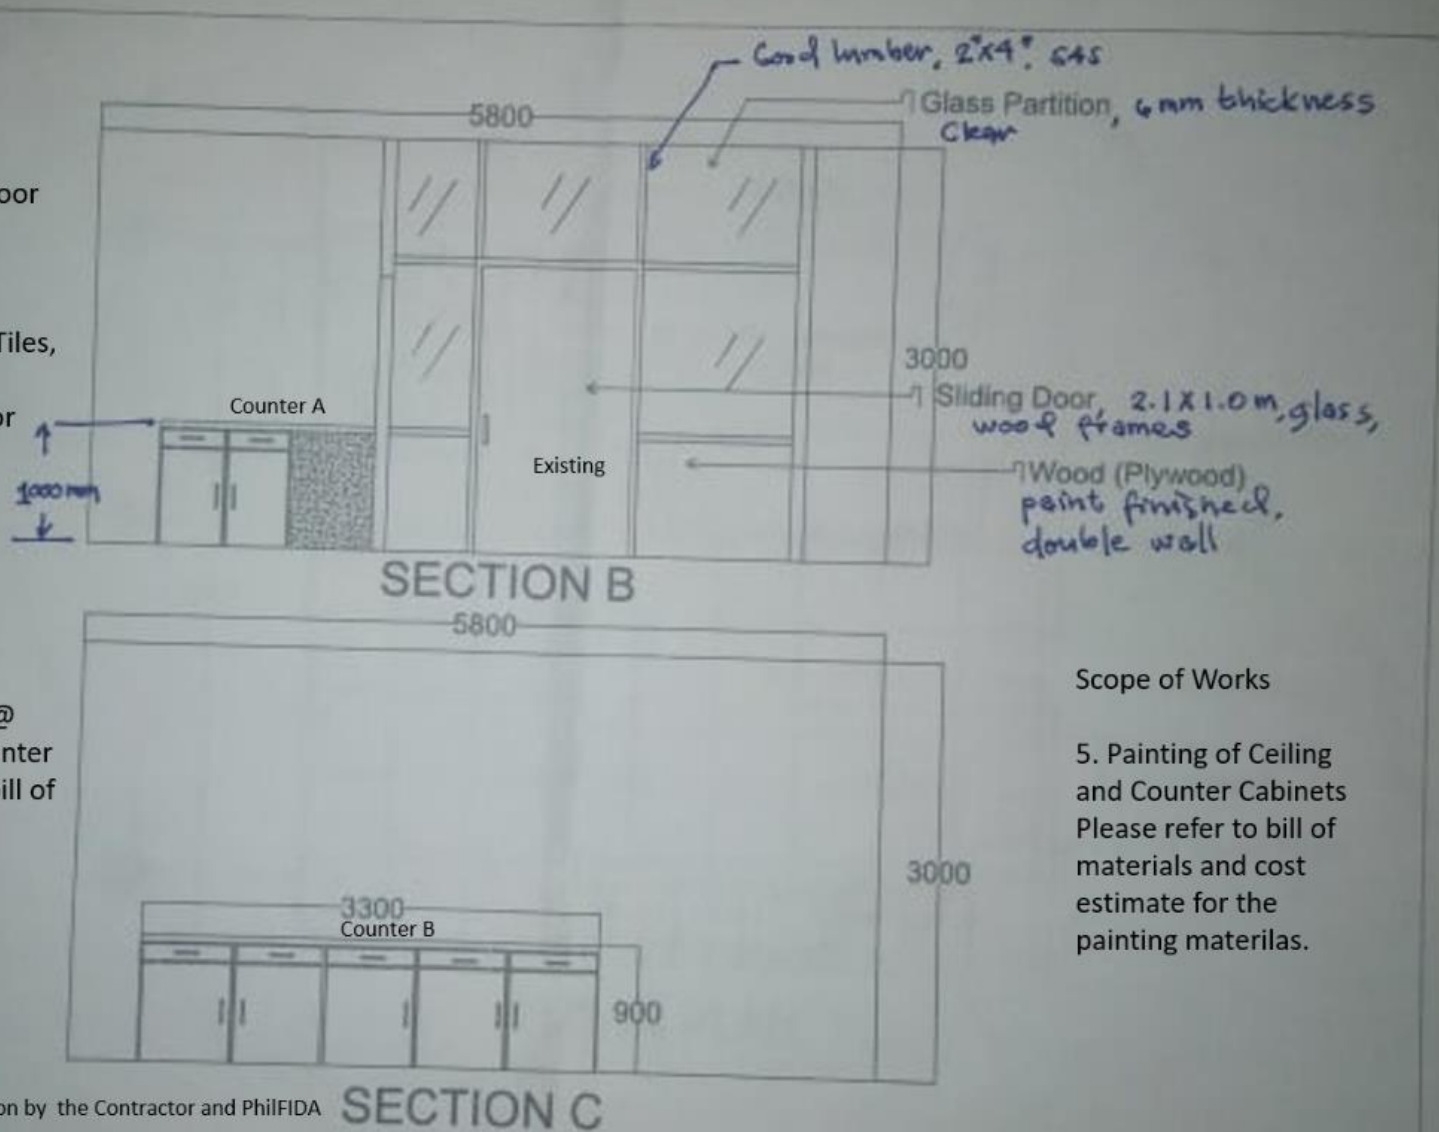

Scope of Works

5. Painting of Ceiling and Counter Cabinets
Please refer to bill of materials and cost estimate for the painting materials.

Note: Subject to actual verification by the Contractor and PhilFIDA

OWNER	PROJECT TITLE/LOCATION	SHEET CONTENTS	RECOMMENDING APPROVAL	APPROVED	SHEET NO.
 <p>PHILIPPINE FIBER INDUSTRY DEVELOPMENT AUTHORITY 3/F DA-PCAF BLDG., DEPARTMENT OF AGRICULTURE ELLIPTICAL ROAD, DILIMAN, QUEZON CITY</p>	<p>Provision of Ceiling, Lighting, Floor Tiles, Counter Cabinets and Painting of Ceiling and Counter Cabinets at Dynamic Spinning Machine Area at PhilFIDA-FPUL, BAI Compound, Visayas Ave, Brgy. Vasra, Quezon City</p>		<p>REMEDIOS V. ABGONA, PhD CHIEF, FIBER UTILIZATION AND TECHNOLOGY DIVISION</p>	<p>KENNEDY T. COSTALES EXECUTIVE DIRECTOR III</p>	<p>A-02 02/15</p>

Scope of Works

3. Installation of Floor Tiles


Use the following material:

- a. Ceramic Floor Tiles, 60cm x 60 cm, color subject for approval
- b. Tile Adhesive
- c. Tile Grout
- d. Tile Adhesive Modifier

4. Installation of Counter Cabinets @ Counter A and Counter B, please refer to bill of materials and cost estimate for the installation of materials.



Note: Subject to actual verification by the Contractor and PhilFIDA

OWNER	PROJECT TITLE/LOCATION	SHEET CONTENTS	RECOMMENDING APPROVAL	APPROVED	SHEET NO.
 <p>PHILIPPINE FIBER INDUSTRY DEVELOPMENT AUTHORITY 3/F DA-PCAF BLDG., DEPARTMENT OF AGRICULTURE ELLIPTICAL ROAD, DILIMAN, QUEZON CITY</p>		<p>Provision of Ceiling, Lighting, Floor Tiles, Counter Cabinets and Painting of Ceiling and Counter Cabinets at Dynamic Spinning Machine Area at PhilFIDA-FPUL, BAI Compound, Visayas Ave, Brgy. Vasra, Quezon City</p>	<p>REMEDIOS V. ABGONA, PhD CHIEF, FIBER UTILIZATION AND TECHNOLOGY DIVISION</p>	<p>KENNEDY T. COSTALES EXECUTIVE DIRECTOR III</p>	<p>A-02 02 15</p>